


EZ Clean Meat Processing Conveyor

FEATURES :


- Sanitary EZ Clean Hygienic Design
- Designed to exceed AMI-USDA Guidelines
- Engineering adaptations available
 - Cutting Boards
 - Side Leaves
- USDA-FDA- Manual Clean Belts
- Wide Range Configurations

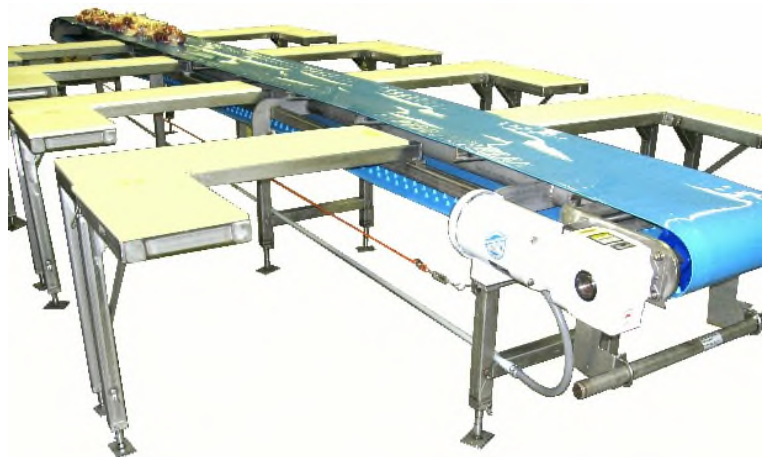

BENEFITS:

- Quick Clean Features
- Direct Drive "Blue Belts"
- Eliminates belt tracking problems
- Easy to clean in place
- Endures wet, harsh environments
- Quiet - reducing noise in the plant
- Reduces power & environmental costs

Conveyor Configurations	
USDA-FDA Food Contact Applications	Elevator Feeder
	Dewater Belt
	Cutting Belt
	Grading Belts
Packaging & Processing Appl.	Transfer Belt
	Sort Belt
	Belt Feeder
	Grading
	Infeed Belts
	Merge/Diverge
	Feed Hopper

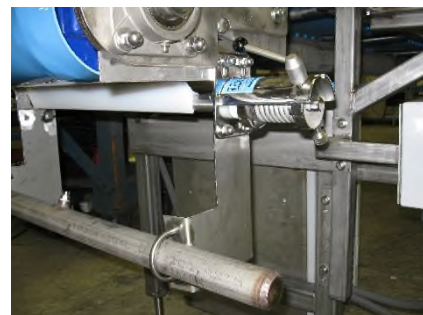

□ CDS LIPE * 800-448-7822



EZ Clean Conveyor

Belts & Surfaces

Cleated Incline Chemical/Oil/Cut Resistant
 Indexing Dewatering
 USDA- FDA Meat, Poultry & Dairy Belts

Frame:

304 SS Central Tube –Open Deck Construction

Bearings:

Double-seal, sealed for life ball bearings.

Supports: Several styles to choose from including Portable and fixed Sanitary Style Legs. Ceiling hangers & custom supports.


Drive Configurations: Multiple drive locations including top mount, side mount, bottom mount, shaft offset mount. Direct Belt Drive Can Push a direct drive belt. Epoxy Painted & Stainless Motor/Reducers available.

Hoppers & Side Leaves: 3, 6 and 8 cu ft hoppers standard. 6" 12" and 18" Side leaves standard.

Drive Types: Gearmotor, parallel shaft and right angle drives are used. Multiple voltages, CE, NEMA frames are available.

Pulley: Sprocket- Direct Belt Drive,


Controls: Standard Nema Enclosures available w/ start/stop, e stop, indexing and variable speed controls

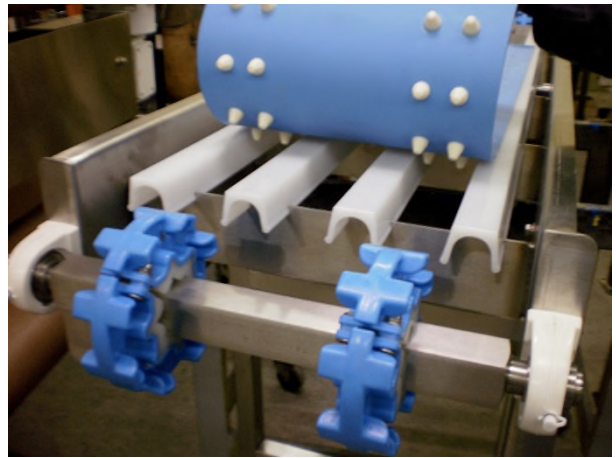

* Features direct driven belt and open deck construction

Model	Belt W"	Belt L "
SBM1224 to SBM241200	12"	18" to 1200"
SBM1824 to SBM241200	18"	24" to 1200"
SBM2424 to SBM241800	24"	24" to 1200"
SBM3224 to SBM241800	32"	24" to 1200"
SBM3624 to SBM241800	36"	24" to 1200"
SBM4824 to SBM241800	48"	24" to 1200"

* Note: Any width can be accommodated in any Increment between 12" and 60". Conveyor length subject to belt live load requirements.

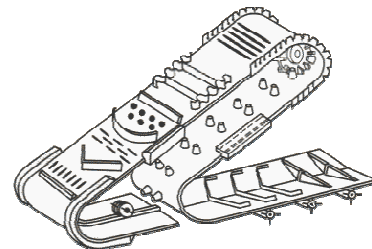

Multiple Belt Attachment Options

Dyna-Belt®